




METZGER/McGUIRE

INDUSTRY STANDARD INDUSTRIAL FLOOR JOINT FILLERS & REPAIR PRODUCTS



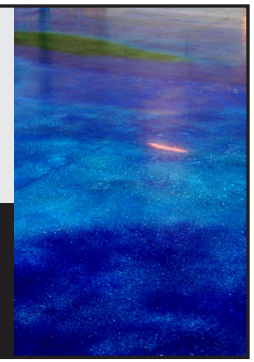



FLOOR JOINT FILLERS AND REPAIR PRODUCTS FOR STAINED & POLISHED CONCRETE FLOORS

Metzger/McGuire offers a variety of durable, top quality floor floor joint fillers and surface repair products ideal for use in stained and polished concrete floors. Our fillers and repair products are well suited for typical grinding/polishing operations and are ready for grinding in as little as 25 minutes after placement.

While most of the products listed below will accept most stains, we recommend choosing one of our Popular Colors or having us custom match your color choice to ensure consistent, lasting color as part of your decorative floor system. Custom colors are our specialty and we can provide you with exacting color-matched materials quickly with modest minimum quantities.

Call us today and find out how Metzger/McGuire can help provide you with color consistent, long lasting concrete surface and floor joint solutions to complement your stained/polished floor system.

| PRODUCT |  |  |  |  |
|-----------------------------|--|---|---|---|
| PRODUCT DESCRIPTION | Fast Set, Low Viscosity Structural Repair Product | Rapid Set, Semi-Rigid Polyurea Joint Filler | Rapid Set, Semi-Rigid Polyurea Joint Sealant | Heavy Duty, Semi-Rigid Epoxy Joint Filler |
| TYPICAL USES | Structurally repair concrete surface defects including pop-outs, gouges, nail holes, etc. Repair static cracks less than 1/8" in width. | Fill or repair control and construction joints in industrial and retail concrete floors. Repair active cracks exceeding 1/8" in width. | Seal control and construction joints in retail and commercial concrete floors. Repair active cracks exceeding 1/8" in width. | Fill or repair control and construction joints in industrial and retail concrete floors. Repair active cracks exceeding 1/8" in width. |
| SHORE HARDNESS | D 70-75 | A 88-92 | A 64-69 | A 90-95 |
| SOLIDS CONTENT | 100% | 100% | 100% | 100% |
| TACK FREE TIME | 2-3 minutes | 7-10 minutes | 3-5 minutes | 5-6 hours |
| INITIAL GRIND/POLISH | 25 minutes | 1 hour | 1 hour | 8 hours |
| TRAFFIC READY | 15-30 minutes | 1 hour | 30 minutes | 6-8 hours |
| LEED COMPLIANT | Yes | Yes | Yes | Yes |
| COLORFAST | Yes | Yes | Yes | Color Dependent |
| STANDARD COLOR | Standard Gray | Standard Gray | Standard Gray | Standard Gray |
| CUSTOM COLORS | Yes | Yes | Yes | Yes |
| DISPENSING METHOD | Dual cartridge | Dual cartridge or pump | Dual cartridge or pump | Hand mix or pump |
| AVAILABLE PACKAGING | 250 ml universal cartridge 600 ml dual cartridge | 600 ml dual cartridge 10 gallon unit | 900 ml dual cartridge 15 gallon unit | 1 gallon unit 5 gallon unit |



800.223.MM80
www.metzgermcguire.com

Headquarters: P.O. Box 2217 Concord, NH 03302
Fax: 603.224.6020 E-Mail: specmm80@aol.com
Regional Offices: Atlanta - St. Louis - Denver - Portland