



Acceptable Alternate Filling Procedures

In some instances joint filler installers may request approval to use filling details that vary from the standard details shown on *Technical Bulletin T4*. The following filling procedures are acceptable to Metzger/McGuire **if** also approved by project authorities.


Polyurea As Base to Seal Off Shrinkage Crack

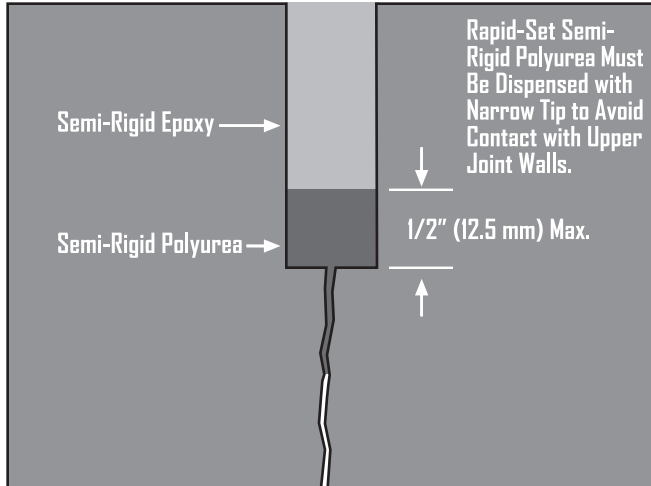

Sand-Modified Epoxy As A Base Pass

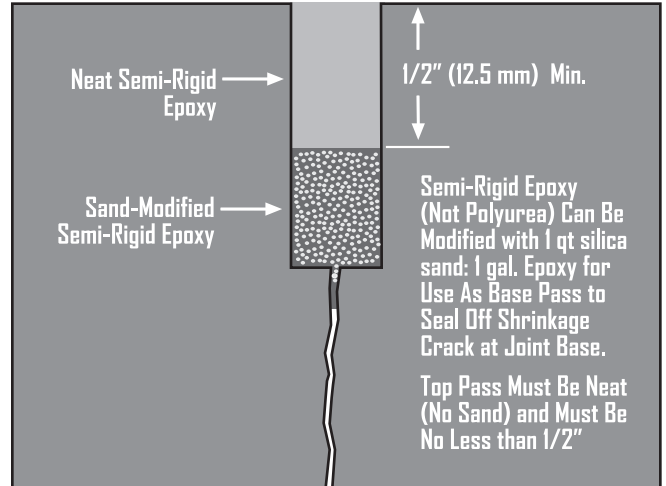

Joints With Excessive Opening

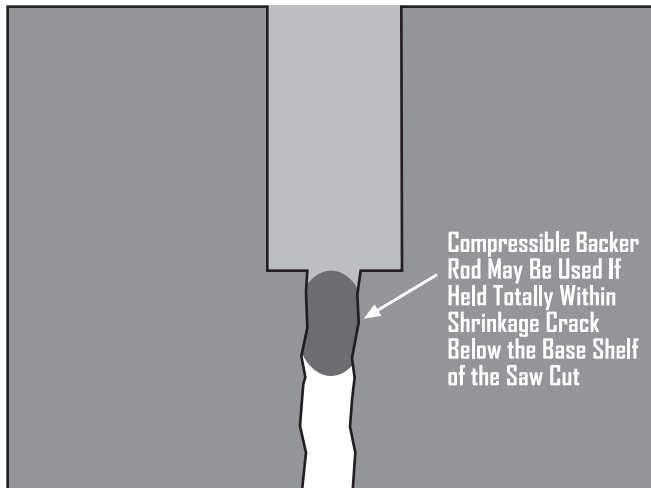

Joints in Non-Trafficked (i.e. Retail) Floors

